

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number
WO 2005/040943 A3

(51) International Patent Classification?: **G04B 17/06**,
F16F 1/02

(21) International Application Number:
PCT/GB2004/004012

(22) International Filing Date:
17 September 2004 (17.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0324439.9 20 October 2003 (20.10.2003) GB

(71) Applicant and

(72) Inventor: LEVINGSTON, Gideon [GB/FR]; 50 Avenue
Francis de Croisset, F-06130 Grasse (FR).


(74) Agents: HOLT, Daniel et al.; Mewburn Ellis LLP, York
House, 23 Kingsway, London, Greater London WC2B 6HP
(GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BALANCE WHEEL, BALANCE SPRING AND OTHER COMPONENTS AND ASSEMBLIES FOR A MECHANICAL OSCILLATOR SYSTEM AND METHODS OF MANUFACTURE

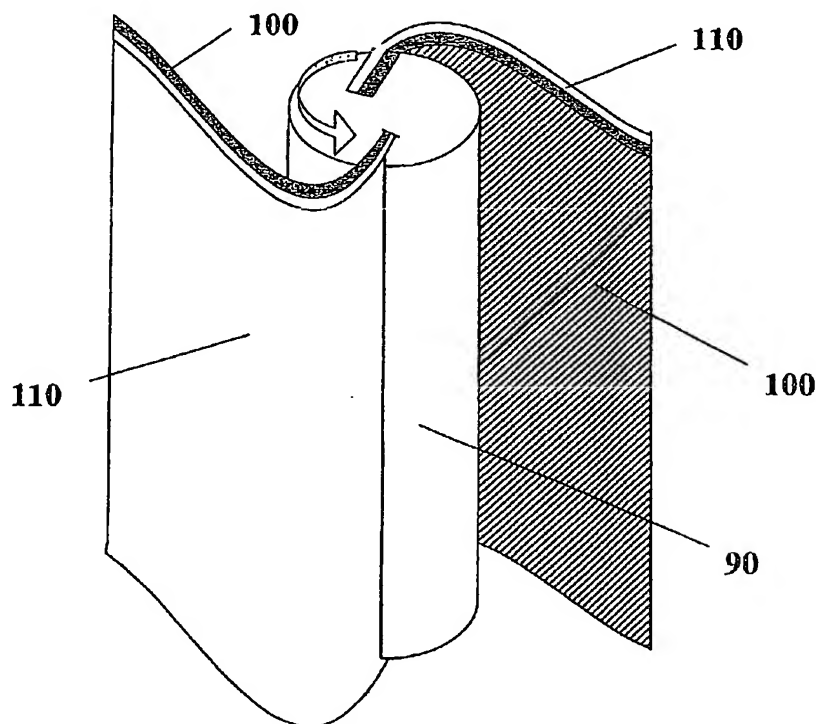

(57) Abstract: The application discloses a method of making a balance spring (100) from continuous fibres or ceramic by winding them around a cylindrical former (90), interspaced with a releasing agent (110). Also disclosed is a method of making a balance spring, preferably of a ceramic material (60), by applying it to a rotating former (70) mandrel or plate and subsequently heat treating. Balance wheels (30) having a moment of inertia which decreases with a rise in temperature due to a special arrangement of components (8, 9, 10) having different coefficients of thermal expansion are also disclosed. A mechanical oscillator system comprising a non-magnetic ceramic or continuous fibre balance spring (50) and a non-magnetic balance wheel (30) formed of a material having a coefficient of thermal expansion of less than $6 \times 10^{-6} \text{K}^{-1}$ and having a plurality of non-magnetic poisoning or timing appendages (5) is also disclosed.

WO 2005/040943 A3



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

23 June 2005